

# GRX®

## 5-FINGER GRAB




Bent body in Strenx® 700 high strength structural steel

Claws in Hardox® 450 wear-resistant steel

Check valve and accumulator optional on GRX20-5 & 25-5

Universal hole pattern for

Angled excavator attachment | RMR compact rotator | WDR worm drive

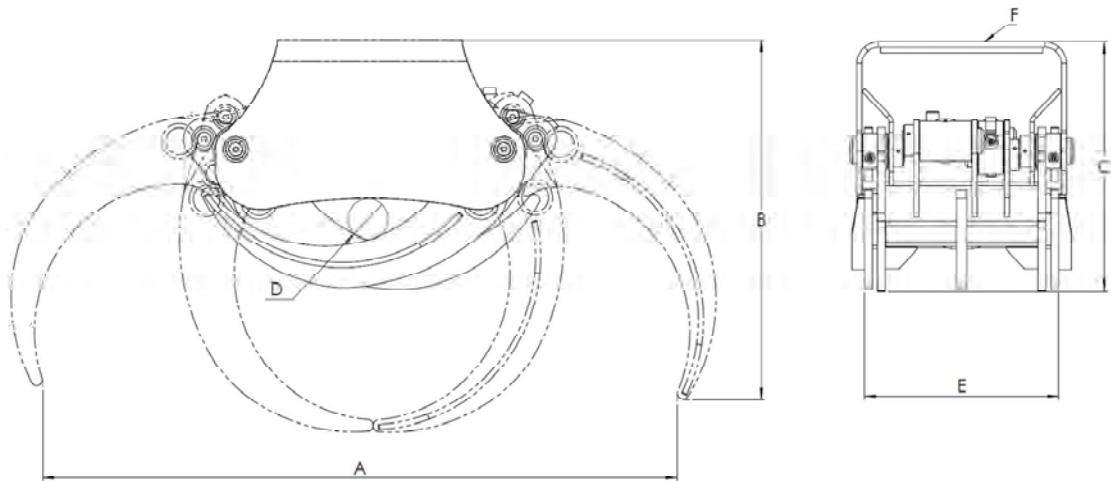

### MODEL SPECS



| MODEL    | Kg  | m <sup>2</sup> | Bar | l/min | kN   | ton   |
|----------|-----|----------------|-----|-------|------|-------|
| GRX 10-5 | 66  | 0,10           | 200 | 20    | 7,2  | 1,5-3 |
| GRX 15-5 | 95  | 0,14           | 200 | 20    | 7,2  | 3-6   |
| GRX 20-5 | 170 | 0,19           | 250 | 30    | 11,3 | 5-9   |
| GRX 25-5 | 248 | 0,24           | 250 | 40    | 14,9 | 8-13  |

|          | GRX 10-5                   | GRX 15-5                                  | GRX 20-5                                 | GRX 25-5                                 |
|----------|----------------------------|---|--|--|
| <b>A</b> | 970                        | 940                                       | 1234                                     | 1385                                     |
| <b>B</b> | 465                        | 578                                       | 688                                      | 790                                      |
| <b>C</b> | 345                        | 394                                       | 485                                      | 533                                      |
| <b>D</b> | 60                         | 63  | 78                                       | 85                                       |
| <b>E</b> | 333                        | 316                                       | 377                                      | 419                                      |
| <b>F</b> | 140x140 M16<br>Center Ø110 | 140x140 M16<br>205/110 M12<br>Center Ø110 | 140x140 M16<br>270/16 M16<br>Center Ø145 | 140x140 M16<br>270/16 M16<br>Center Ø145 |